

EN	E.LUMEN 500 MULTI-FUNCTIONAL FLASHLIGHT	01
	USER GUIDE	
FR	E.LUMEN 500 LAMPE DE POCHE MULTIFONCTIONNELLE ...	07
	GUIDE DES UTILISATEURS	
DE	E.LUMEN 500 MULTIFUNKTIONALE TASCHENLAMPE	14
	BENUTZERHANDBUCH	
ES	E.LUMEN 500 LINTERNA MULTIFUNCIONAL	21
	GUÍA DEL USUARIO	
JP	E.LUMEN 500 多機能懐中電灯	26
	取り扱い説明書	

E.LUMEN 500 MULTI-FUNCTIONAL FLASHLIGHT

Model: R526ELS

 **User Guide**

IMPORTANT SAFETY INSTRUCTIONS

Please read the User Guide carefully before recharging or operating your flashlight.

IMPORTANT SYMBOLS

WARNING

Indicates potentially dangerous conditions that could result in personal injury

CAUTION

Indicates conditions or practices that could result in damages to the unit or other equipment

NOTE

Indicates procedures or functions that are important for proper and safe operation of the unit and/or other equipment

WARNING

DO NOT point the flashlight directly into eyes as it may cause damage to vision.

CAUTION

DO NOT submerge the flashlight in water. If the flashlight becomes submerged, turn the flashlight off and pour out as much water as possible. Place the flashlight on a flat surface and allow it to dry under normal circumstances before next use.

CAUTION

Please recharge the flashlight if its brightness becomes noticeable dim.


CAUTION

DO NOT disassemble, strike, or otherwise abuse the flashlight. Doing so may cause a circuit failure and/or solar panel fracture, which can affect charging, recharging, and illumination functions.

PACKAGE CONTENTS

- 1 x Renogy E.LUMEN 500 Multi-functional Flashlight
- 1 x Micro USB Cable
- 1 x User Guide

PRODUCT OVERVIEW

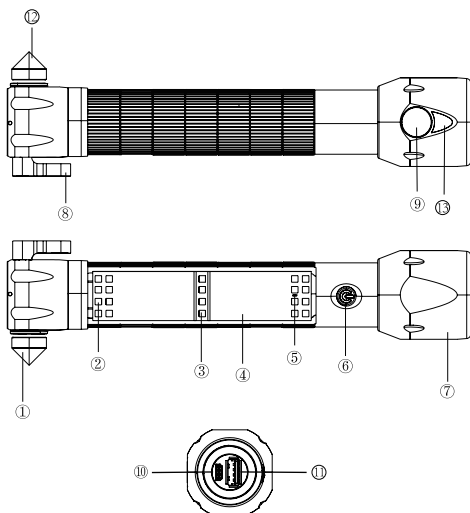

- ① Glass Shattering Hammer
- ② Red Sidelight
- ③ White Sidelight
- ④ Solar Panel
- ⑤ LED Solar Indicator
- ⑥ Power Button
- ⑦ Headlight
- ⑧ Seat Belt Cutter
- ⑨ Magnet Attachment
- ⑩ Micro USB Port
- ⑪ USB Port
- ⑫ Protective Cap
- ⑬ Anti-slip Pad

SPECIFICATIONS

General		
Materials		Aluminum
Dimension		Head Diameter: 1.6 inch / 40.5mm Body Diameter: 1.18 inch / 30mm Length: 8.27 inch / 210mm
Weight		10.44 oz / 296 g
Recharge Time		1.5 Hours (Via USB Port) 65 Hours (Via sunlight)
Run Time	Headlight	Bright: 1.5 Hours Dim: 2-3 Hours Strobe: 2-3 Hours
	White Sidelight	Bright: 8-9 Hours Dim: 15-16 Hours
	Red Sidelight	Fast: 15-16 Hours Slow: 15-16 Hours
Battery		
Type		Lithium-ion
Capacity		3.7V, 2600mAh / 9.62Wh

Solar Panel	
Solar Cell	Monocrystalline
Rating	5V / 50mA
Ports	
USB Output	5V / 2A Max
Micro USB Input	5V / 2A Max
LED	
Headlight	500 Lumens
Sidelight	150 Lumens

OPERATION

- Short press the Power Button to turn on the flashlight and switch between different modes. Long press the Power Button to cycle between Headlight, White Sidelight, and Red Sidelight.
- The Headlight has three light modes: bright (100% brightness), dim (50% brightness), and strobe.
- The White Sidelight has two flood modes: bright (100% brightness) and dim (50% brightness).
- The Red Sidelight has two strobe modes: fast and slow.
- To recharge the flashlight via the Micro USB Cable, unscrew the bottom cap and connect the flashlight to a wall charger or other power sources using the included micro USB cable. The red recharging indicator will illuminate. When the flashlight is fully recharged, the recharging indicator will turn green.

- To recharge the flashlight via sunlight, place it under direct sunlight with the Solar Panel facing up. The flashlight will begin to recharge automatically with the blue LED Solar Indicator illuminating.
- To charge USB-enabled devices, unscrew the bottom cap and connect the device to the USB Port of flashlight with a USB cable. The blue charging indicator will illuminate and stay on until the built-in battery runs low and cuts off the USB connection. At this point, the flashlight will be able to run for another thirty minutes at a reduced brightness level of 30%.

NOTE

The solar panel is designed for auxiliary recharging. Please do not solely rely on it for a full recharge when other power sources are available. Solar recharging time may vary according to weather conditions.

WARRANTY

- RENOGY products are covered by a 1-year limited warranty from the original purchase date. If any problems occur, please contact us for assistance. Refer to the last page of User Guide for contact information.
- We only provide after-sales services for products that are sold by RENOGY or retailers and distributors authorized by RENOGY. If you have purchased your unit from other channels, please contact your seller for more information about return and warranty.
- Please register your purchase(s) directly at www.renogy.com/warranty-registration or your region's corresponding website so that we can stay in touch and contact you in the unlikely event that a safety recall is required.